

MEDIUM WASH LW-LA-MW



MEDIUM WASH LW-LA-MW

FITTING COLOUR Black, White

LIGHT SOURCE COD LED

COLOUR TEMPERATURE Warm White 3000K, Cool White 5500K

MOUNTING METHOD 3 Wire Single Phase Track

DIMENSIONS 156mm (length) x Ø 65mm

VOLTAGE 240V/12V

TILT, ROTATE ANGLE 90°, 350°

BEAM ANGLE OPTIONS 15°, 25°, 38°, 60° **POWER** 15W

CRI 9.0

LUMEN OUTPUT 1200lm


AVERAGE LIFESPAN 50,000 Hours


DIMMING OPTIONS Phase dimming

TRIM COLOUR Black and White

PRODUCT WARRANTY 2 Years Manufacturers Warranty

WATERPROOF RATING



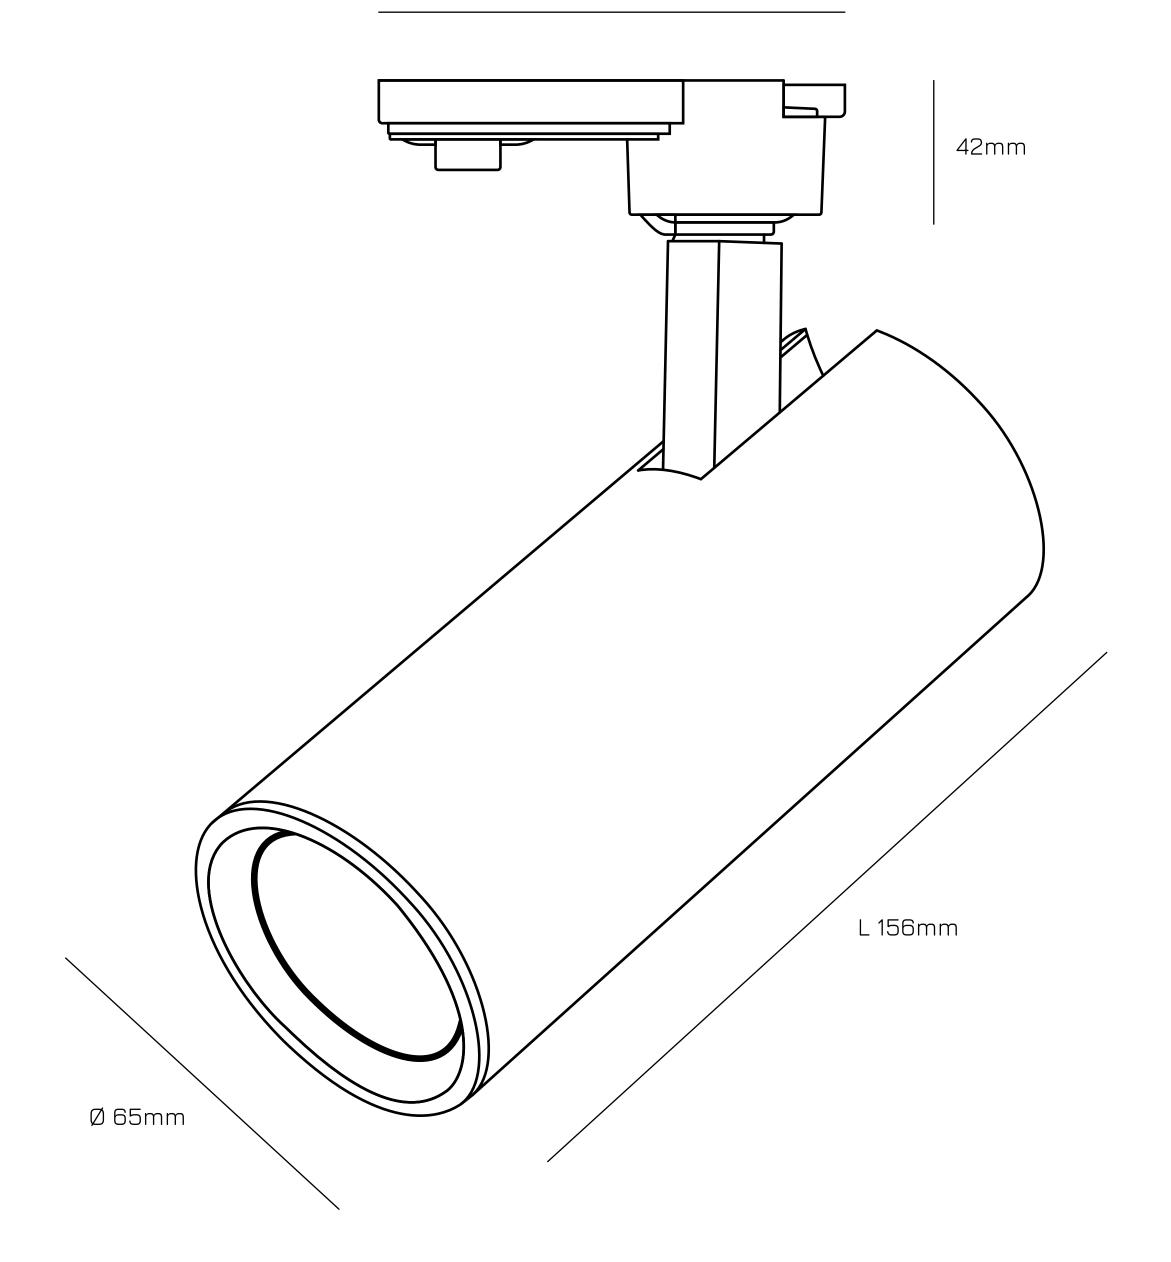

MEDIUM WASH LW-LA-MW

Single Circuit Track Adaptor

This means that all the lights will dim at the same time and turn ON and OFF within the same circuit.

90° Tilt

You can tilt the light up and down pointing in closer to the object that you need to illuminate.

CRI 90

Colour Rendering Index of 90 is the quality of the LED that is used. This means the colours of the art work remain vibrant.

Cast Aluminium, **Powder Coated**


The body of the luminaire is a strong cast aluminum with a matte finish powder coat.

360° Swivel

You can swivel the the light 360 degrees giving a full range of motion.

Anti-Glare Reflector

This helps the light beam angle distribute and assists with anti glare.

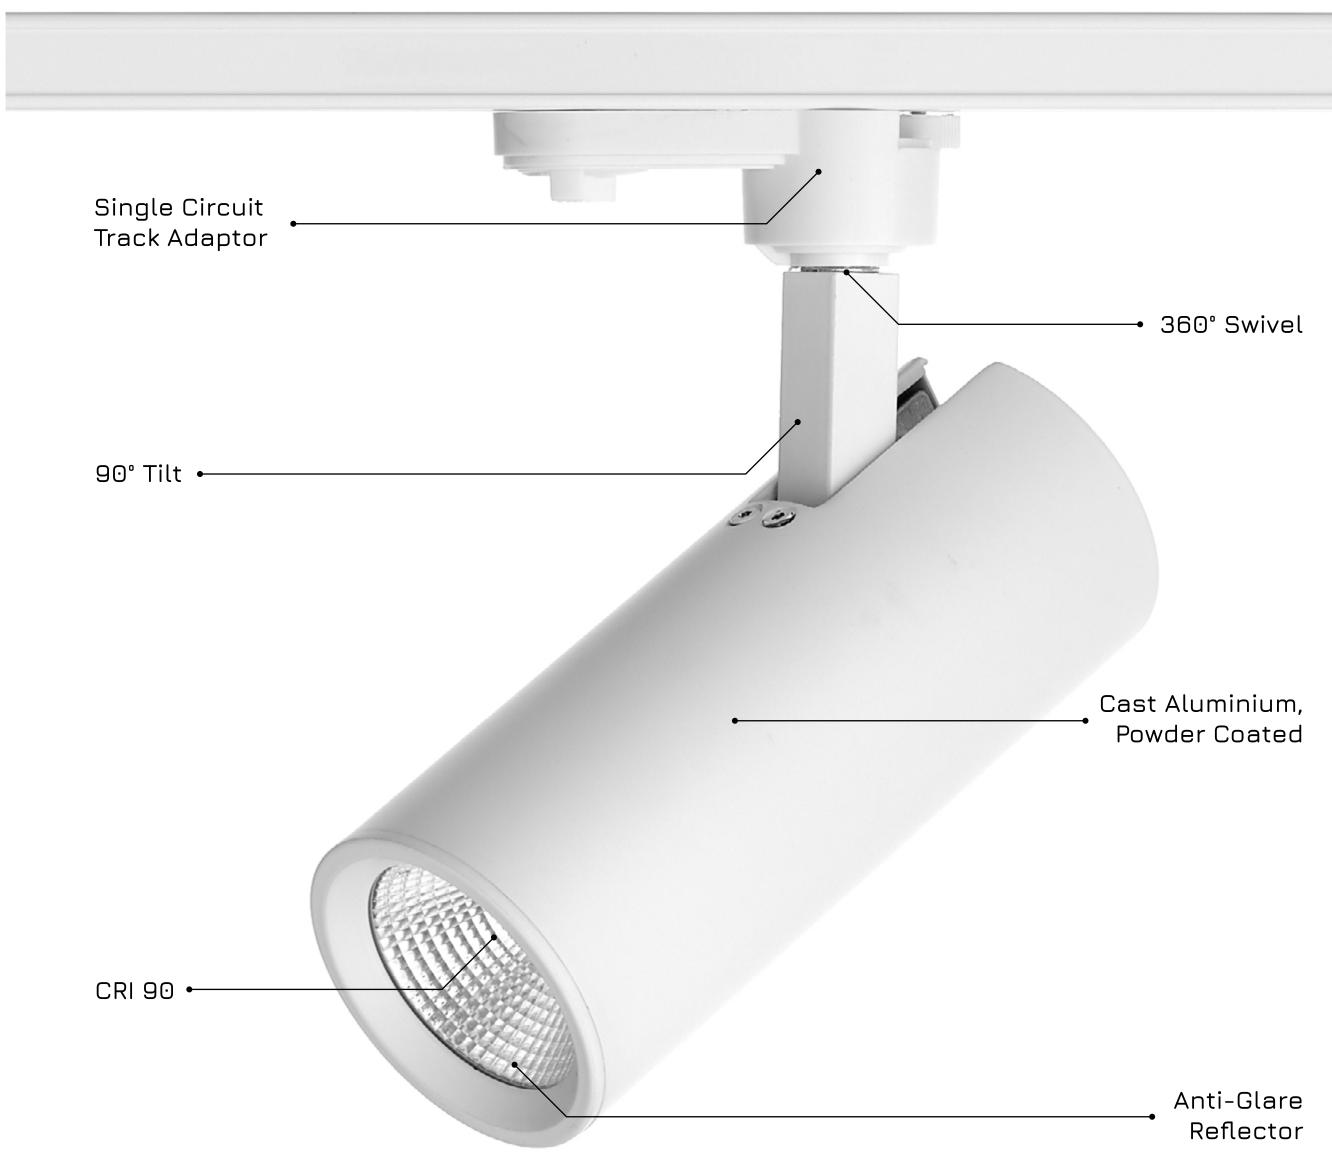


 _	 -	 	


MEDIUM WASH AVAILABLE IN BLACK OR WHITE FINISH



INSTALLATION

L'Art is our entry-level gallery lighting range, with simple guidelines for installation. L'Art track should be placed 1.2 meters from artwork, with lights spaced 1 meter apart to create a medium wall wash effect. The range is available in black and white and has a CRI of 90, for excellent colour rendering. Lights are dimmable at the wall via phase dimming.

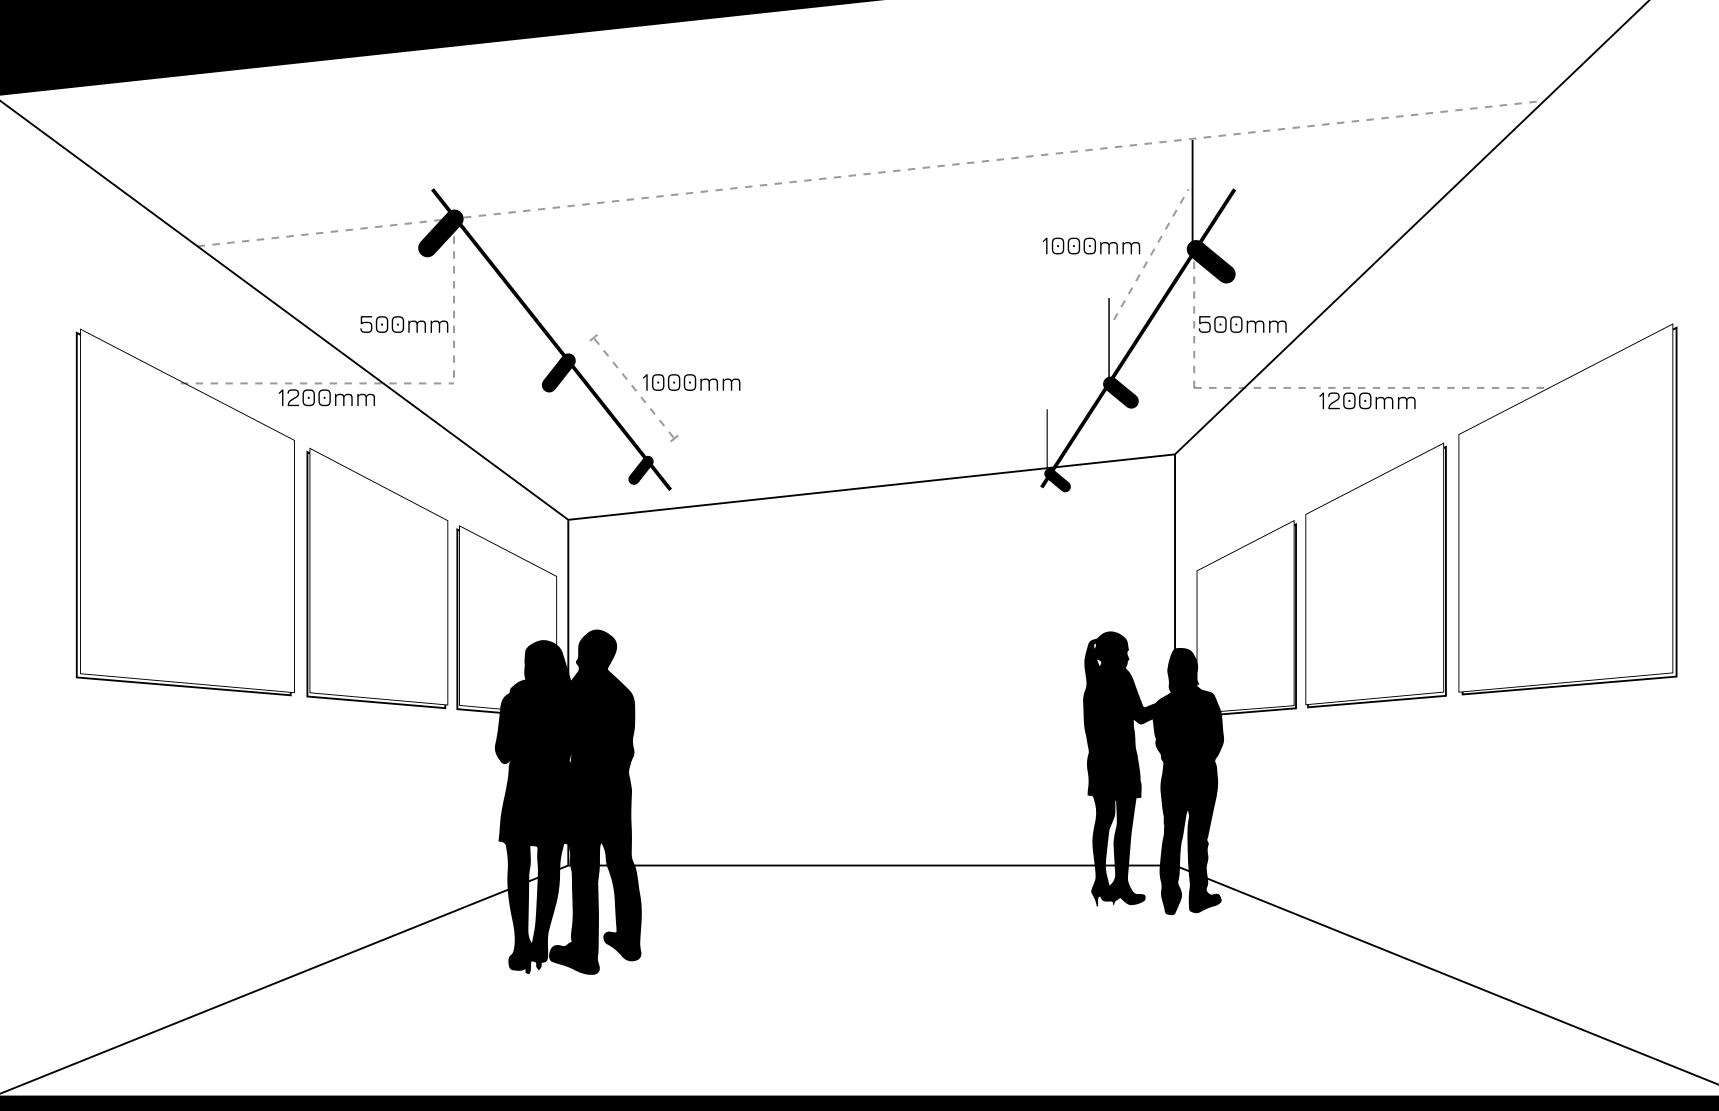

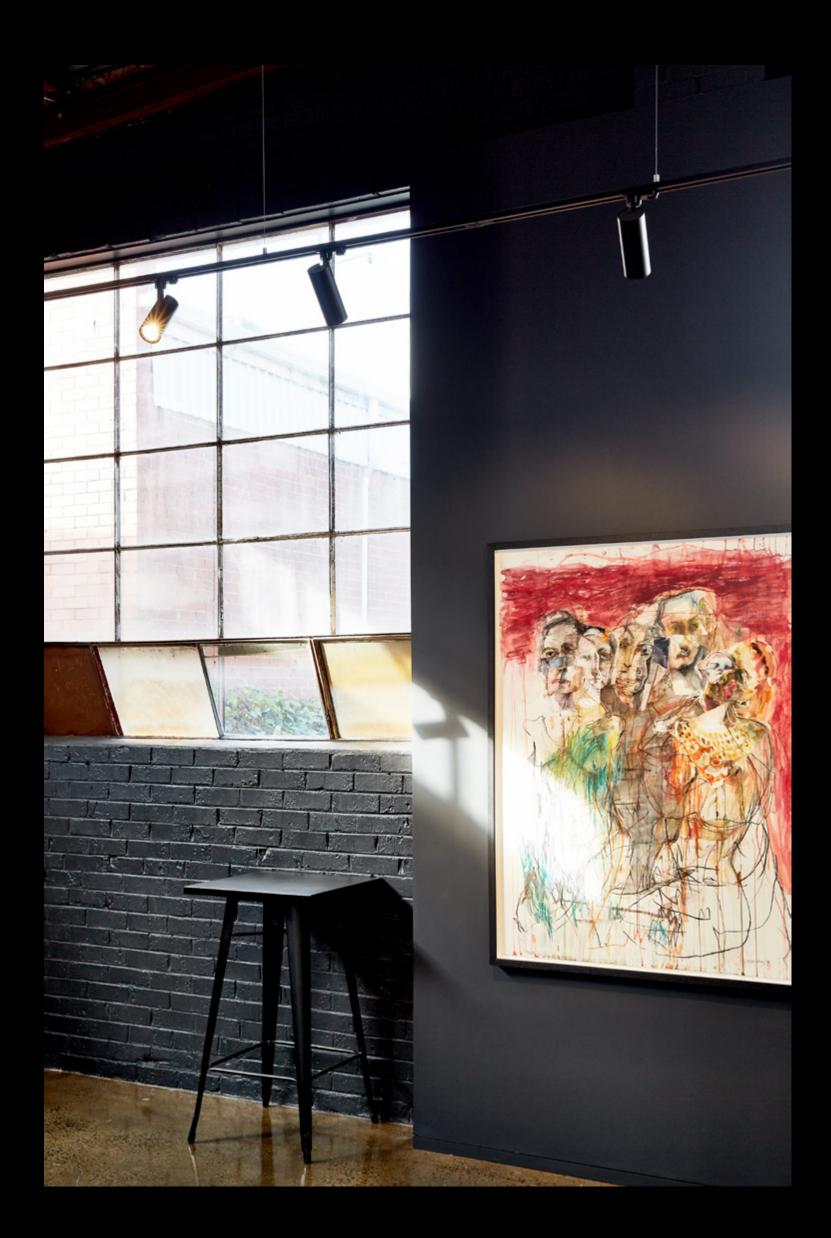



60





